





STORAGE BIN WITH ROTARY EXTRACTOR

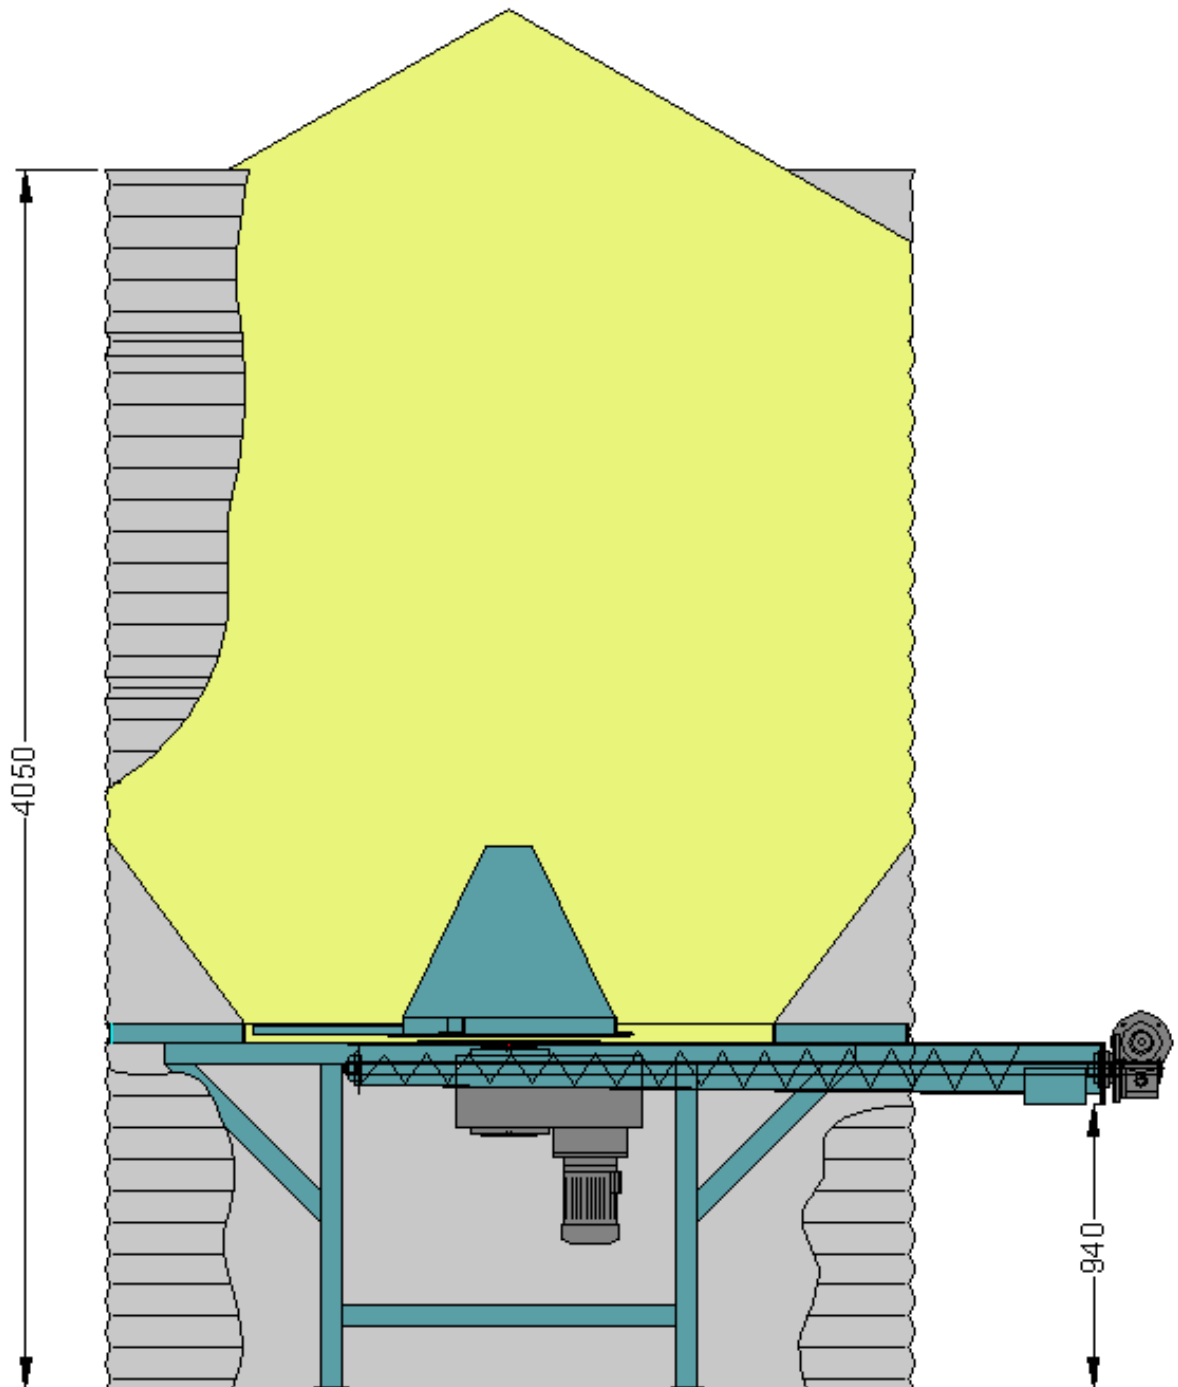


For low-density products

SPECIFICATIONS

CONSTRUCTION	Frame and platform in weld-fabricated steel Bin in ribbed galvanised sheets Ø2.68m
MOTORISATION	Debridger with 1 arm: 3 kW motor-gearbox unit Extraction auger in trough with conical thread: motor reduction gear unit 1.1 kW
EQUIPMENT	- Tarpaulin roof - Access hatch to motor drive with safety switch
DIMENSIONS	Ø2.68 x H: 4.05 - Theoretical capacity 14 m ³
OPTIONS	- speed control under housing for adjusting the flow rate of the extraction auger - translucent downpipe, Ø200 - additional vessels (H:1.20 – capacity 7 m ³)

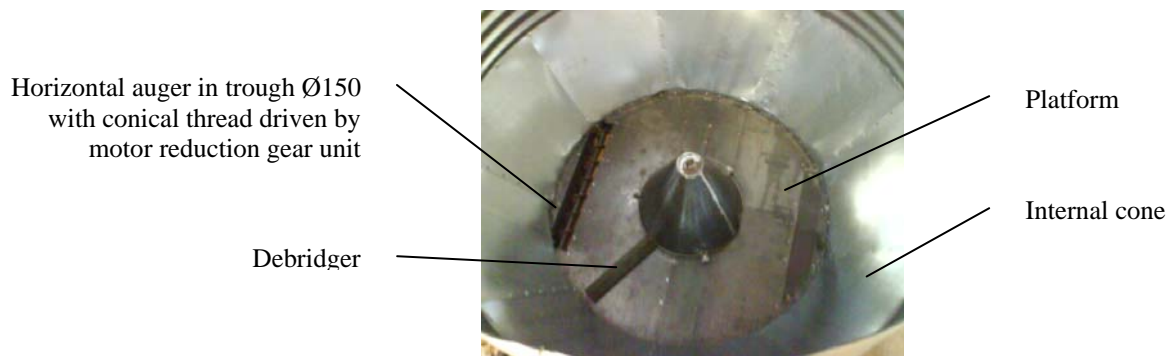

APPLICATION

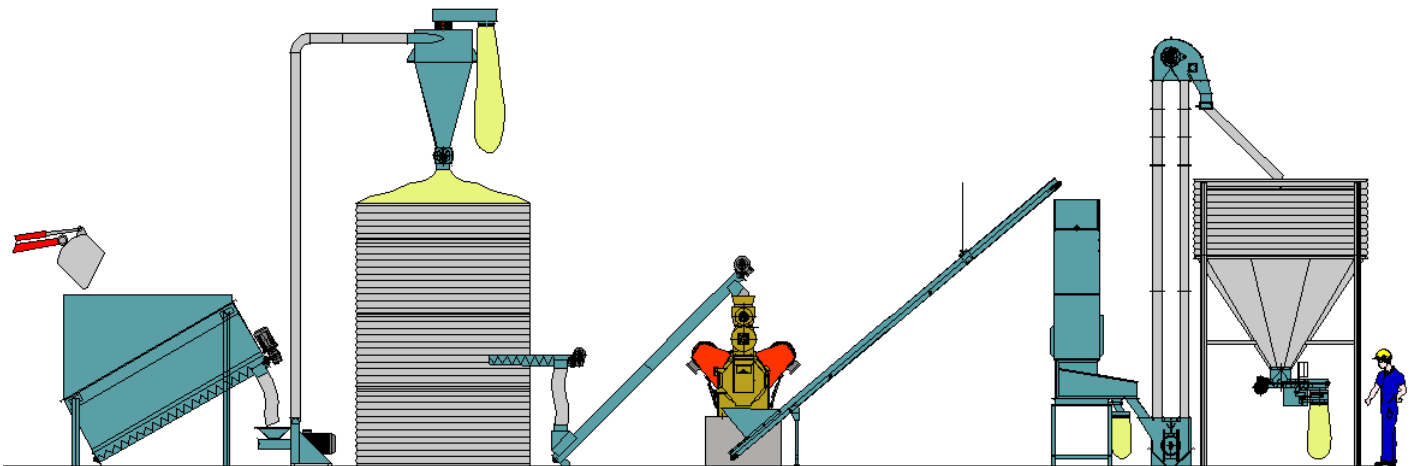

MILLING LINE - PELLETISING OF SAWDUST AND WOOD CHIPS



47170 POUDENAS - FRANCE

Tel.: +33 (0)5 53 65 73 55

Fax: +33 (0)5 53 97 33 05

e-mail: elevage@electra.fr

www.electra.fr