



## DIRECT FLOW GRINDING MILL




F6 N DD  
FOR BULK QUANTITIES.

## SPECIFICATIONS

|                          |                                                                                                                                                                                                                                                |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CONSTRUCTION</b>      | weld-fabricated steel                                                                                                                                                                                                                          |
| <b>MOTORISATION</b>      | 20 HP (15 kW) and 30HP (22kW)                                                                                                                                                                                                                  |
| <b>SPEED OF ROTATION</b> | 1500 (30 m/s) to 4500 (90m/s) rpm depending on the application                                                                                                                                                                                 |
| <b>DRIVE</b>             | toothed V-belts<br>and sheaves under housing                                                                                                                                                                                                   |
| <b>FEED</b>              | gravity                                                                                                                                                                                                                                        |
| <b>GRIDS</b>             | semi-circular Ø3 to 12 mm with chain tensioning system                                                                                                                                                                                         |
| <b>HAMMERS</b>           | 24, thickness 8 mm                                                                                                                                                                                                                             |
| <b>EQUIPMENT</b>         | <ul style="list-style-type: none"> <li>- anti-vibration mounts</li> <li>- interchangeable wear plates</li> </ul>                                                                                                                               |
| <b>OPTIONS</b>           | <ul style="list-style-type: none"> <li>- input hopper with magnetic shielding</li> <li>- vibrating dispenser with electronic regulation</li> <li>- feed auger controlled by speed controller</li> <li>- discharge chute with flange</li> </ul> |
| <b>DIMENSIONS</b>        | 1050x700x770 mm                                                                                                                                                                                                                                |
| <b>WEIGHT</b>            | 330 kg                                                                                                                                                                                                                                         |
| <b>SOUND LEVEL</b>       | This equipment may significantly exceed 80 dB(A)                                                                                                                                                                                               |

## PERFORMANCE

**DEPENDING ON THE PRODUCTS AND GRIDS USED: FROM 1 TO 4 T/H**

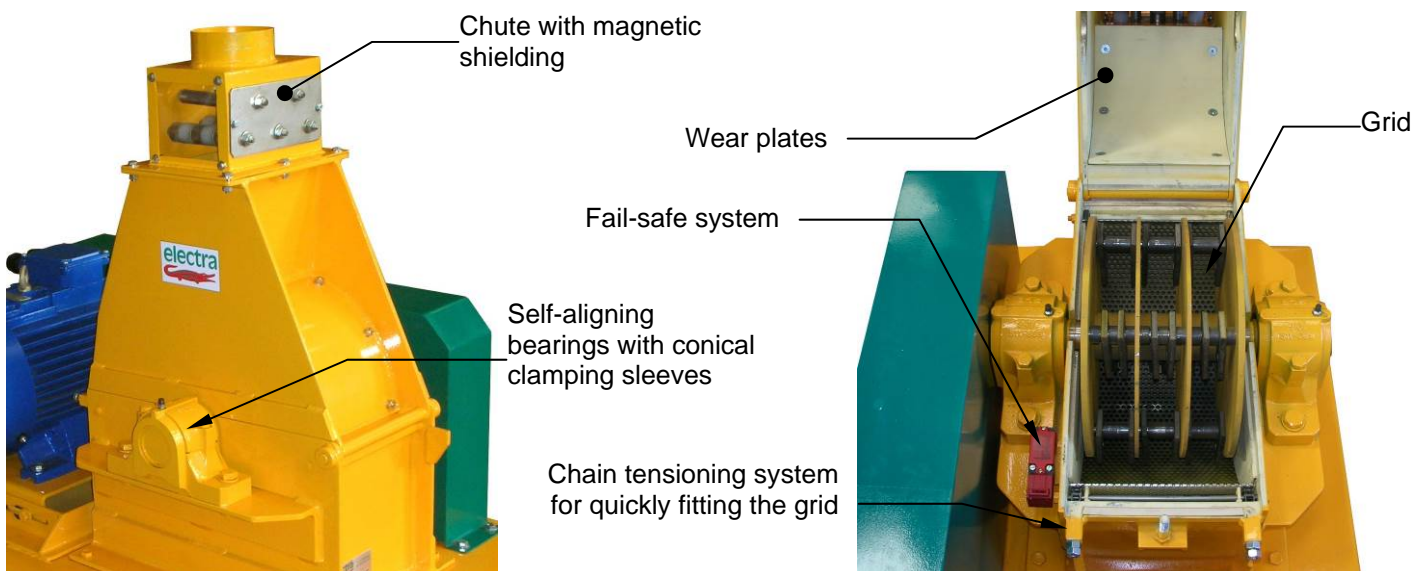

The technical specifications may be subject to change without notice



**47170 POUDENAS - FRANCE**

Tel.: +33 (0)5 53 65 73 55

Fax: +33 (0)5 53 97 33 05

e-mail: [elevage@electra.fr](mailto:elevage@electra.fr)

Internet: [www.electra.fr](http://www.electra.fr)