


PNEUMATIC CONVEYOR

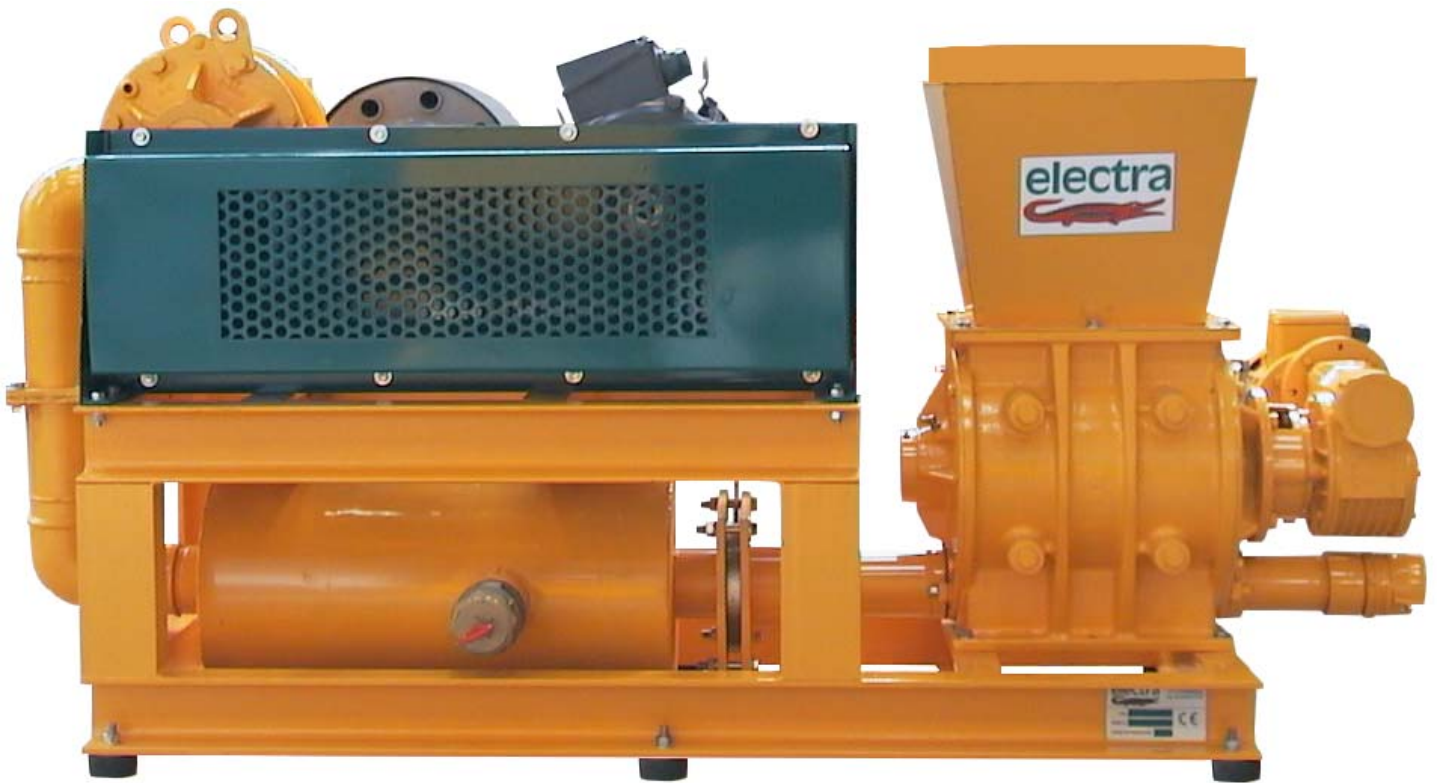

FOR THE TRANSFER OF FEEDSTUFFS FROM THE PRODUCTION FACILITY TO THE LIVESTOCK SHEDS.


SPECIFICATIONS

| | TYPE URAI 33 | TYPE URAI 45 |
|-----------------------|--|---|
| CONSTRUCTION | frame in weld-fabricated profiles anti-vibration mounts | |
| EQUIPMENT | <ul style="list-style-type: none"> • booster with rotating pistons, • air filter, • expansion chamber, • depressurisation valve, | <ul style="list-style-type: none"> • pressure gauge 6 bars, • non-return valve, • fluidisation rotary discharger. |
| MOTORISATION | booster: <ul style="list-style-type: none"> - three-phase 7.5 kW motor, - belt drive. rotary discharger: <ul style="list-style-type: none"> - 0.37 kW motor-gearbox unit. | booster: <ul style="list-style-type: none"> - three-phase 11 kW motor, - belt drive. rotary discharger: <ul style="list-style-type: none"> - 0.37 kW motor-gearbox unit. |
| DISCHARGE PIPE | steel Ø60.3 mm or polyethylene Ø63mm | |
| OPTION | Level detector with time delay for auto-shutdown | |

PERFORMANCE

1.5 to 3.5 t/h depending on distance (50 to 150 m) and the foodstuff carried.

OVERALL DIMENSIONS

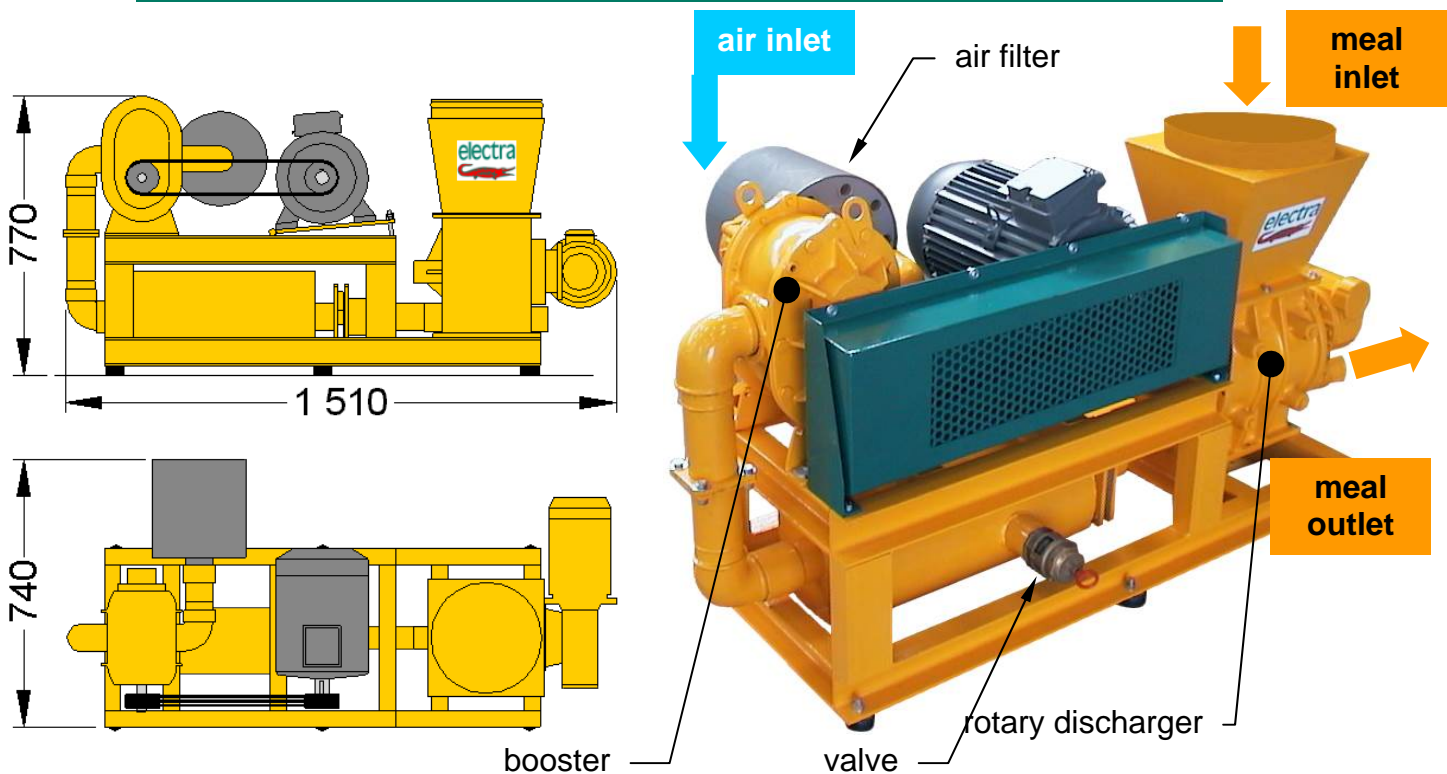

The technical specifications may be subject to change without notice




47170 POUDENAS - FRANCE

Tel.: +33 (0)5 53 65 73 55


Fax: +33 (0)5 53 97 33 05

e-mail: elevage@electra.fr

www.electra.fr

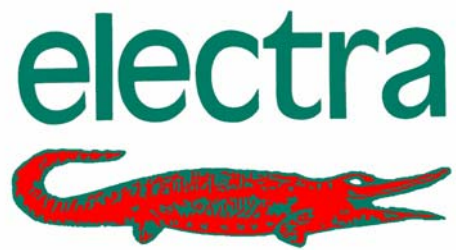

PNEUMATIC CONVEYOR

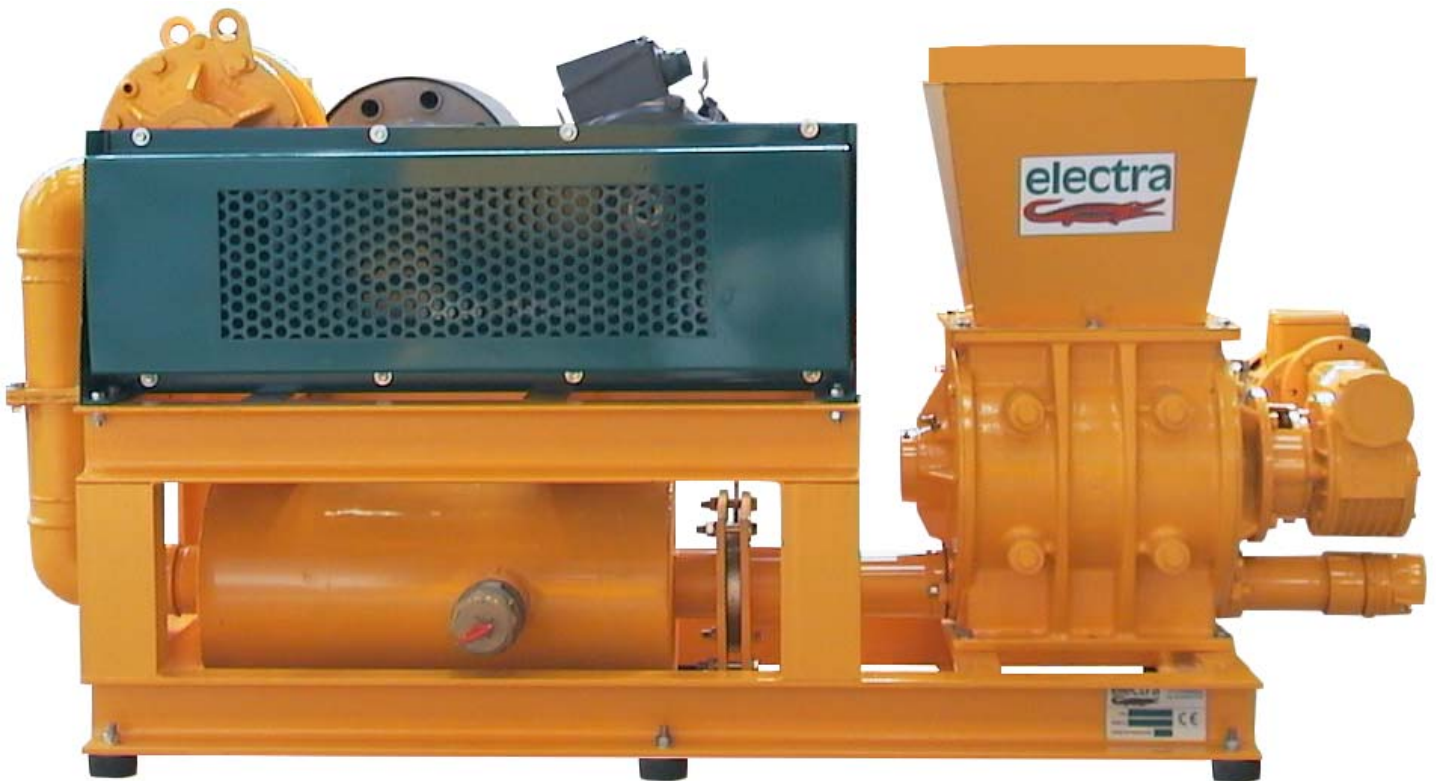

FOR THE TRANSFER OF FEEDSTUFFS FROM THE PRODUCTION FACILITY TO THE LIVESTOCK SHEDS.


SPECIFICATIONS

| | TYPE URAI 33 | TYPE URAI 45 |
|-----------------------|--|---|
| CONSTRUCTION | frame in weld-fabricated profiles anti-vibration mounts | |
| EQUIPMENT | <ul style="list-style-type: none"> • booster with rotating pistons, • air filter, • expansion chamber, • depressurisation valve, | <ul style="list-style-type: none"> • pressure gauge 6 bars, • non-return valve, • fluidisation rotary discharger. |
| MOTORISATION | booster: <ul style="list-style-type: none"> - three-phase 7.5 kW motor, - belt drive. rotary discharger: <ul style="list-style-type: none"> - 0.37 kW motor-gearbox unit. | booster: <ul style="list-style-type: none"> - three-phase 11 kW motor, - belt drive. rotary discharger: <ul style="list-style-type: none"> - 0.37 kW motor-gearbox unit. |
| DISCHARGE PIPE | steel Ø60.3 mm or polyethylene Ø63mm | |
| OPTION | Level detector with time delay for auto-shutdown | |

PERFORMANCE

1.5 to 3.5 t/h depending on distance (50 to 150 m) and the foodstuff carried.

OVERALL DIMENSIONS

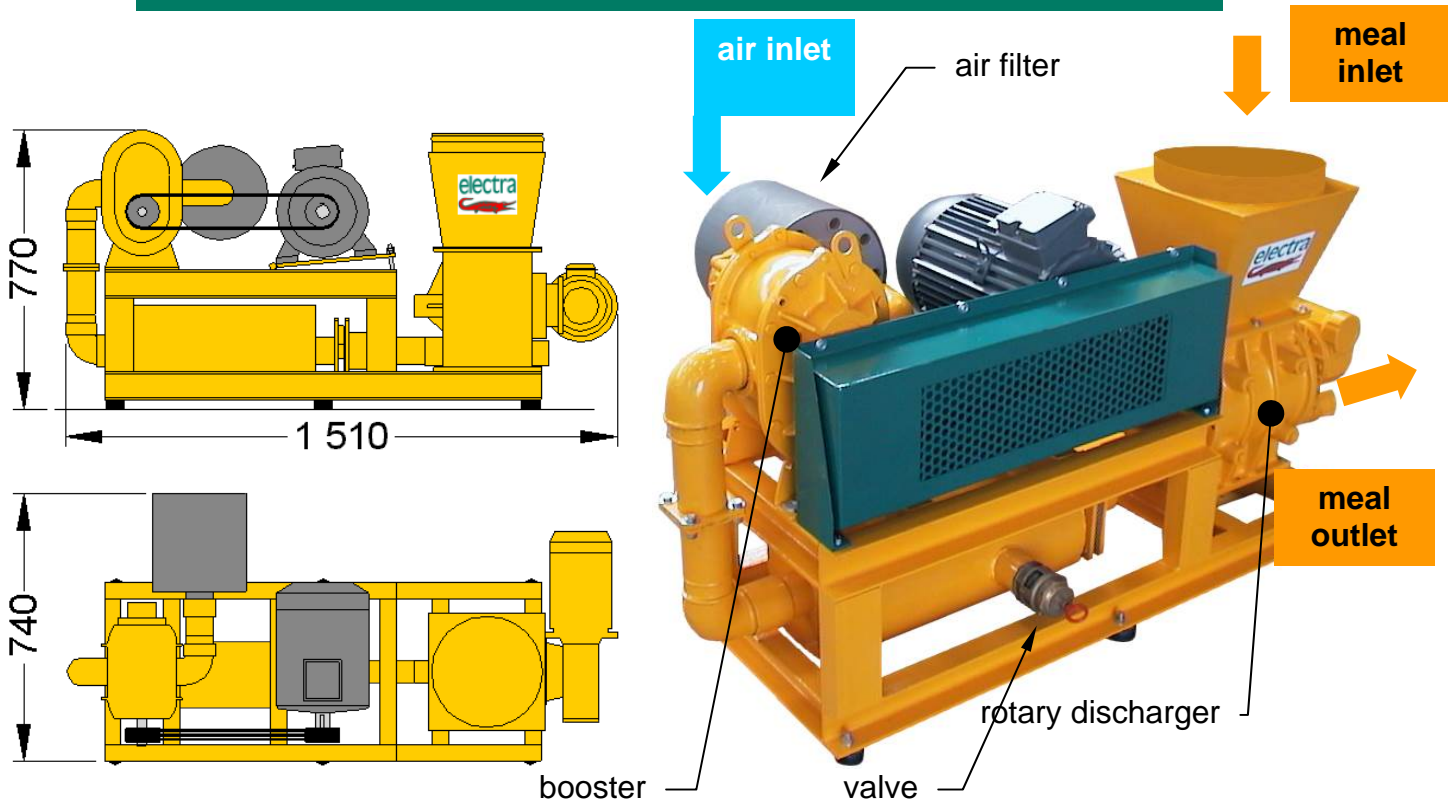

The technical specifications may be subject to change without notice



47170 POUDENAS - FRANCE

Tel.: +33 (0)5 53 65 73 55

Fax: +33 (0)5 53 97 33 05

e-mail: elevage@electra.fr

www.electra.fr