



MOBILE PNEUMATIC CONVEYOR



FOR TRANSFERRING FEEDSTUFFS
MANUFACTURED ON THE FARM
Pellets or powders


SPECIFICATIONS

CONSTRUCTION	towed on rigid axle and pneumatic tyres (27 km/h max)
EQUIPMENT	<ul style="list-style-type: none"> • parking brake • lighting board, • pallet booster with forced lubrication with decanting filter • anti-bridging system by fluidisation for regular discharge • supporting arm for flexible hose Ø50 mm length 12 m,
DRIVE	tractor PTO 540 rpm
POWER CONSUMPTION	approximately 50 HP
FILLING	by gravity with cable-operated flap opening
EMPTYING	by flexible PVC hose Ø100 mm and fireman's union 102/114 for silo OR by flexible PVC hose Ø50 mm with ¼ turn valve for feeder
DIMENSIONS LxWxH	3500x2900x3900 mm
WEIGHT AND CAPACITY	2600 kg – 8 m ³
OPTIONS	<ul style="list-style-type: none"> • low-pressure wheels • hose kit Ø50 with Ø100 mm outlet adapter

PERFORMANCE

FLOW RATE 25 TO 30 tonnes/hour with hose Ø100 mm

EXAMPLES OF USE

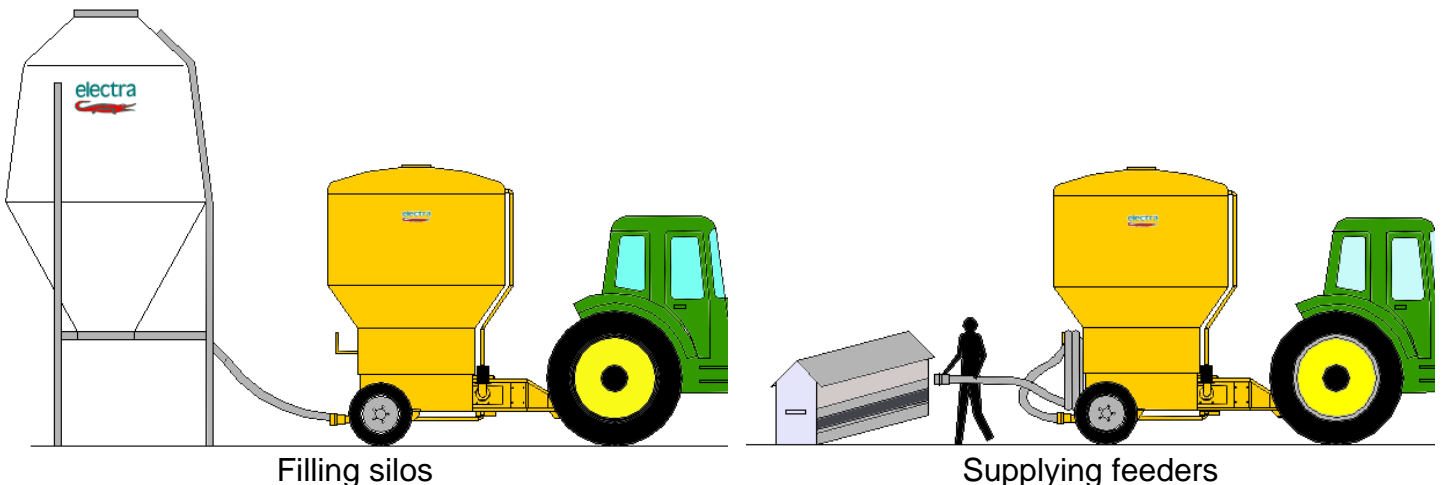

DEVICE NOT RECOMMENDED FOR USE ON THE PUBLIC HIGHWAY

The technical specifications may be subject to change without notice



47170 POUDENAS - FRANCE

Tel.: +33 (0)5 53 65 73 55

Fax: +33 (0)5 53 97 33 05

e-mail: elevage@electra.fr

Internet: www.electra.fr