



VERTICAL GRINDING MILL MIXER BMV 3 - BMV 5




FOR THE PRODUCTION OF FEEDSTUFFS IN
BATCHES OF 1000 or 2000 kg

SPECIFICATIONS

	FEED SILO		GRINDING MILL	VERTICAL MIXER	
TYPE	SG3	SG4	BC	MV 3	MV 5
CAPACITIES	1700 litres	2600 litres		2000 litres	4000 litres
POWERS			7.5 or 15 kW	2.2 kW	5.5 kW
EQUIPMENT	<ul style="list-style-type: none"> - electronic level detector with time delay - flow rate adjustment by suction - magnetic shielding 		<ul style="list-style-type: none"> - 2 circular perforated grids Ø4-6mm - 8 moving hammers, reversible on 4 surfaces - speed of rotation: 3000 rpm - pipes: galvanized steel <ul style="list-style-type: none"> - intake Ø100 mm - discharge Ø100 or 150 mm - cabinet comprising: <ul style="list-style-type: none"> - manual y-delta starter - ammeter for checking current drain - thermal cut-out switch 	<ul style="list-style-type: none"> - 2 air decompression bags - 1 discharge outlet: with helmet valve for bagging - switch and thermal cut-out - option: downwards air expansion box with 2 bags 	

OVERALL DIMENSIONS IN mm

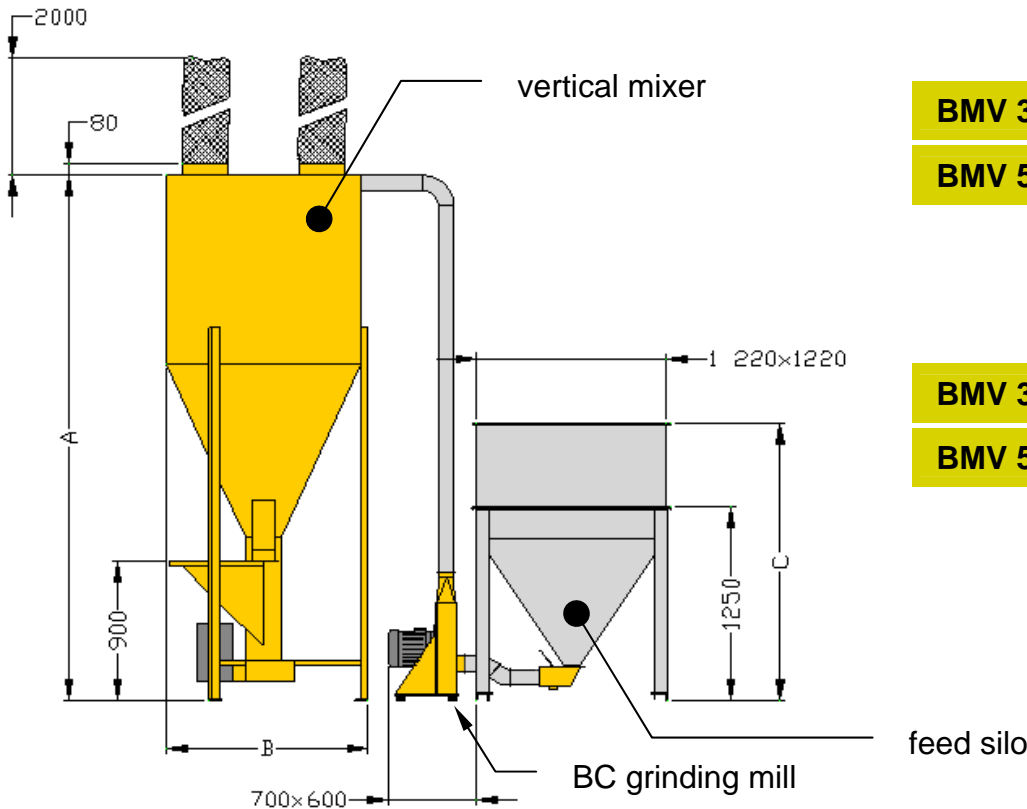

	A	B	C
BMV 3	3350	1250	1800
BMV 5	4020	1800	2500
OVERALL HEIGHT WITH AIR EXPANSION BOX			
BMV 3	3700		
BMV 5	4370		

The technical specifications may be subject to change without notice



47170 POUDENAS - FRANCE

Tel.: +33 (0)5 53 65 73 55

Fax: +33 (0)5 53 97 33 05

e-mail: elevage@electra.fr

Internet: www.electra.fr